TPT1CM/-AN Aquanomic Compression Pillar Tap

Product finish	Chrome
Product category	Pillar
First supplied date	Mid 2012

EAN 13 barcode	5015834043968
Location of DOM trace code:	DOM code on multiple box outer

Nb. Model shown may not be displayed in the finish as described.

Product features:

- Metal construction throughout (plastic hot / cold markers)
- Durable compression valve design
- Supplied with fixed 1/2" inlets
- Flow Limited output for part G compliance
- Brass back fixing nuts

Additional information / Parts included:

ABS indicies caps

Product dimensions & valve type:

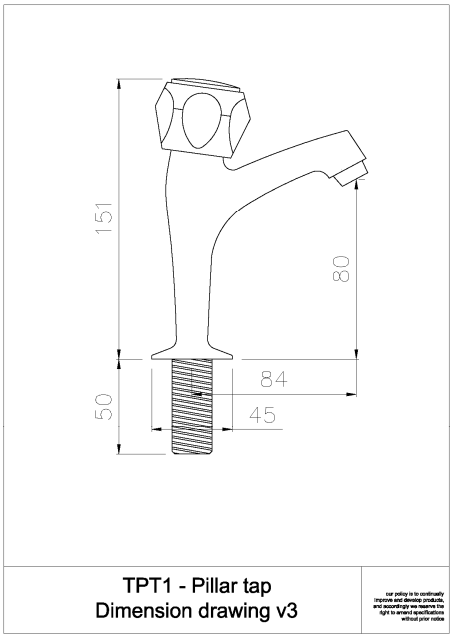

TPT1 - Pillar tap
Dimension drawing v3

our policy is to continually improve and develop products, and accordingly we reserve the right to amend specifications without prior notice

- **Overall Height / projection:** 151 mm
- **Exit reach:** 84 mm
- **Exit height:** 80 mm
- **Centre distance(s):** N/A mm

- **Base diameter(s):** 45 mm
- **Recommended fixing hole diameter:** Ø 32-35 mm
- **Max. surface fixing depth:** 30 mm

- **Control valve type:** 1/2" Compression
- **Valve detail:**

- **DDA compliant design?** No

Product flow characteristics:

	Dynamic working pressure (bar)											
	0.1	0.2	0.3	0.4	0.5	0.75	1	1.5	2	2.5	3	4
Hot water												
Cold water	1.80	2.83	3.25	3.62	3.86	3.99	3.89	4.02	4.12	4.26	4.28	4.19
Mixed water												
Filtered water												
Sprayhead water												
Other (see note 1)												
Other (see note 2)												

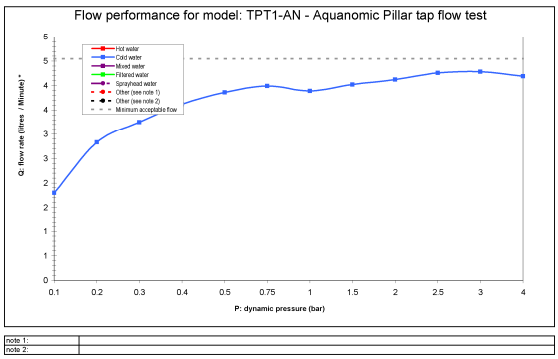

note 1:	
note 2:	

- **Min / Max water pressure:** 0.75 / 4.00 bar (MP)

- **Recommended / Maximum water temperature:** 46°C / 70°C

- **Part G:**
Unrestricted mixed flow rate, 3 bar (litres / min):
8 +/- 10%

*Flow results are produced under test conditions and represent the non flow regulated dynamic output of the product model.

LP (lower pressure) less than 0.5 bar
MP (medium pressure) 0.5 bar to 1 bar
HP1 (high pressure) 1 bar to 2 bar
HP2 (very high pressure) 2 bar or more

Minimum flow rate (1 GPM) based on mixed flow.

TPT1CM/-AN Aquanomic Compression Pillar Tap

Flow regulator included? 2x4 L/Min

Inlet pipes:

- **Tail pipe inlet / outlet size:** N/A / 1/2" BSPP male (15mm ID) to BS2779
- **Inlet pipe type / length:** Fixed threaded inlets / 50 mm

Spout detail & Flow characteristics:

- **Spout diameter:** N/A mm
- **Spout aerator size:** Pushfit
- **Spout rotation range:** 0°
- **Aerator type:** Flow straightener
- **Aerator colouring:** Black plastic flow straightener
- **Spout connection:** N/A
- **Product flow characteristics:** Single flow
- **Non return valve (NRV) supplied:** No, none required
- **NRV required to be installed for byelaw compliance:** None

Product markings and indicators:

- **Branding position:** None
- **Hot / Cold indication:** Red & Blue Plastic Discs

Packaged properties:	
Box length: 250 mm	**Box depth:** 50 mm
Box width: 190 mm	**Units per outer:** 18
Box has 'pressure warning sticker' ?	No
Packaging branding:	Brown unprinted

Tap only weight: 0.51 kg
Boxed weight: 1.20 kg
Total card weight: 142 grams
Total plastics weight: 8 grams

- **Approval certificate number:** in application
- **Expiry date:**

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 2 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 years

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives